


LOW VOLTAGE BATTERY

The LB-6D-G3 is a deep cycle high capacity LFP battery with improved safety, long lifespan, and optimized user experience. It has superior performance with a capacity of 6 kWh for a single unit and a maximum of 96 kWh for 16 batteries in parallel, which can meet the residential electricity demand.

LB-6D-G3

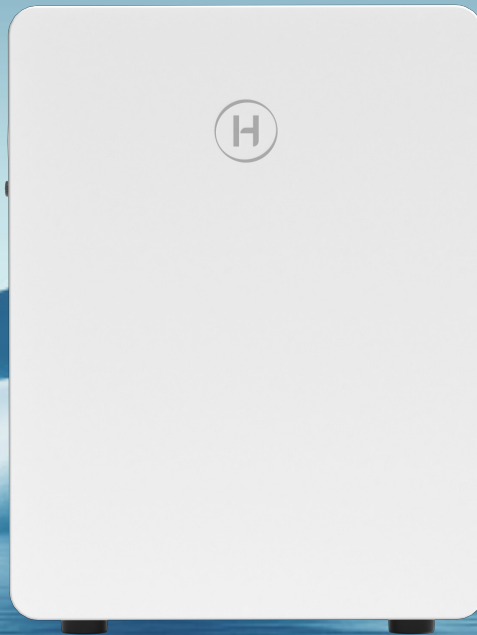

Features

- 01 LFP with improved safety design
- 02 Provides long-lasting performance with 314 Ah cells
- 03 Built-in DC-DC module, supporting mixed use of old and new
- 04 Enables low-temperature charging with an optional heating function
- 05 Flexible capacity options from 6 kWh to 96 kWh
- 06 Designed for indoor/outdoor installation with IP65 protection

Technical Specifications

Model	LB-6D-G3
System Data	
Battery type	LiFePO ₄
Rated capacity (Ah)	314
Total energy (kWh)	6
Rated voltage (V)	51.2
Voltage range (V)	44.8-60
Max. continuous charging/discharging current (A)	60
Peak charging/discharging current (A)	90 (10s)
Communication	CAN
Recommended depth of discharge (DOD)	90%
Max. parallel quantity	16
Protection	
Overvoltage and undervoltage protection	Integrated
Overcurrent protection	Integrated
Overtemperature and undertemperature protection	Integrated
DC breaker	Integrated
Heating	Optional
General	
Dimensions (W × H × D [mm]) ⁽¹⁾	410 × 519 × 236
Weight (kg) ⁽¹⁾	55
Installation Environment	Indoor / Outdoor
Mounting	Wall mounted / Floor standing
Wall-mounted bracket	Optional
Charging temperature (°C)	0 to +55 (-20 to +55 with optional heating)
Discharging temperature (°C)	-20 to +55
Protection degree	IP65
Cooling	Natural convection
Altitude (m)	≤2000
Cycle life (25°C, 0.5C)	8000 Cycles, 90% DOD, 70% EOL
Certification	IEC 62619, UN 38.3, CE-EMC
Warranty ⁽²⁾	5-10 Years

(1) The actual dimensions and weight may differ. For details, please contact Hoymiles sales.

(2) Please refer to Hoymiles Warranty Terms & Conditions for more details.